



Pail Stik™ Chemical Delivery System



Rechargeable Battery Pack




(Optional Feature)

Pail Stik Rechargeable Battery Pack BX1250 (12V5.0AH) Standby/Alarm Use

Optional rechargeable battery pack is designed for use with our Pail Stik accessories. Great for use when electrical plug-in is not available (i.e. under sinks, etc.).

Battery Pack plugs directly into Pail Stik (where AC adapter plugs in). Battery recharges in ~12 hours using the Pail Stik AC Adapter. (NOTE: Don't discard Pail Stik AC Adapter you will need this to recharge your battery.)

Specifications: Constant Voltage Charge, Cycle Use: 14.0-15.0V, Standby Use: 13.5-13.8V, Initial Current: Less than 1.5A

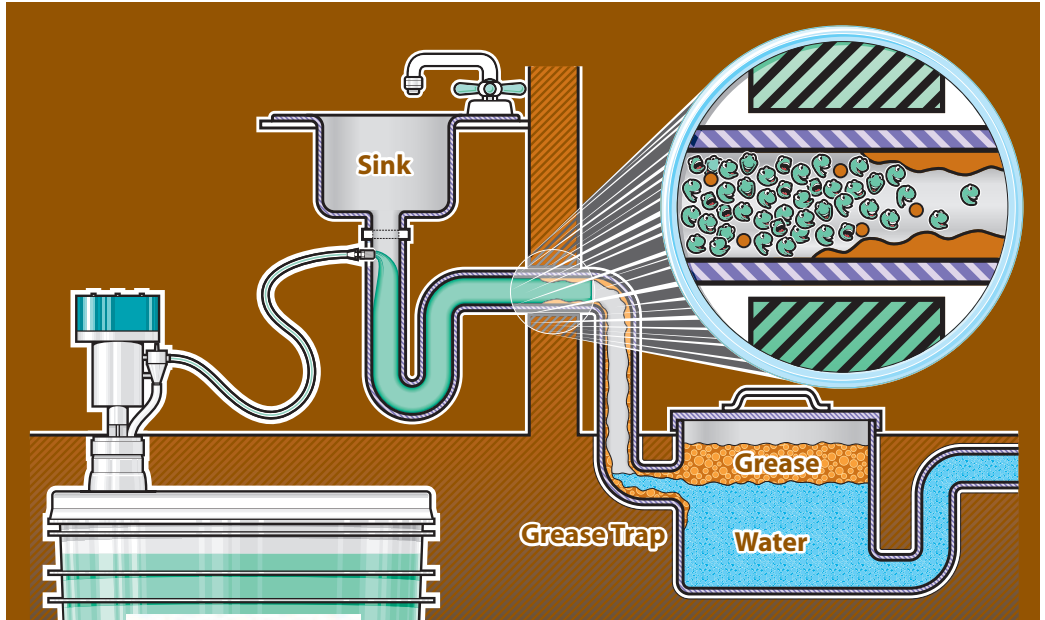

- Use *Pail Stik* with **BioDrain Grease & Waste Digester** for 30 day grease trap maintenance and odor control program
- Simple installation/minimal maintenance
- Easy time adjustments to customize 7 day programs
- Proprietary electronic design for accurate chemical dispensing
- Programmable features allow for up to 8 chemical dosages daily for optimal performance
- Molded of high-impact, chemical-resistant plastic
- Model is available for use with a 5 gallon pail, powered by AC Adapter
- Optional rechargeable battery pack available
- The most affordable chemical dispensing unit in the marketplace today
- Highly effective in septic systems

Accessory	Item#	Packaging	Shipping Wt. (lbs.)	Cube Size (ft. ³)
Pail Stik (AC Adapter Included)	700051	1 Per Case	3.3	0.31
Optional Rechargeable Battery	700003	1 Per Case		

Please contact customer service for specifications.




Clean Control Corporation

Made in the USA
 PO Box 7444 • Warner Robins GA 31095
 Quality Assurance Hotline 800.841.3904
 9:00am-4:00pm Mon.-Fri. (EST)
 odobanprofessional.com




Pail Stik™ Chemical Delivery System

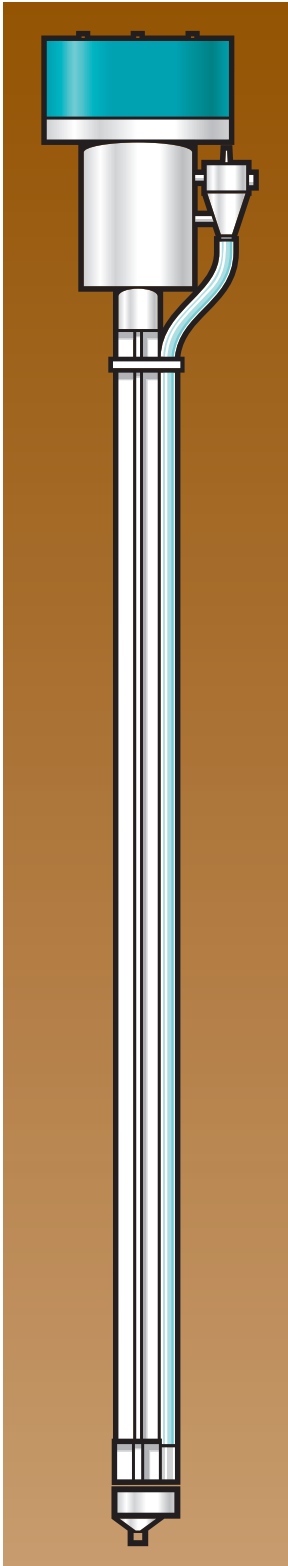

The Clean Control Chemical Delivery System utilizes state-of-the-art technology to consistently deliver a metered chemical dosage for optimum product performance. Dispensers require minimal maintenance and are molded of high-impact, chemical-resistant plastic. Models are available for use with a 5 gallon or *55 gallon drum, powered by battery pack or electrical current, and are the most affordable chemical dispensing units in the marketplace today.

*Please contact Customer Service for Specifications

- **Simple Installation**
- **Easy Time Adjustments to Customize 7 Day Programs**
- **Proprietary Electronic Design for Accurate Chemical Dosages Daily for Optimal Performance**
- **Use with Clean Control BioSolutions for a 30 day Grease Trap Maintenance or Odor Control Program**
- **Highly Effective in Septic Systems**

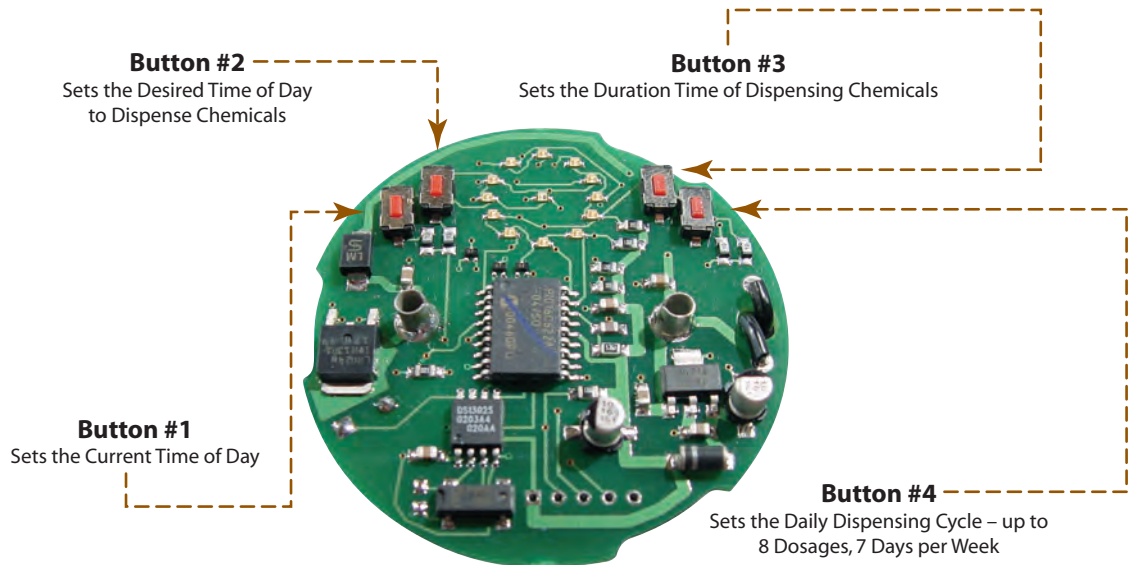

Height:	Pump head protrudes 5 inches above 5 gallon pail when inserted
Weight:	14 oz. excluding power source
Shipping Weight:	4 lbs.
Programmable Timer:	Enclosed in unit Repeat up to 8 times daily 7 day cycle
Electronics:	Epoxy coated electronics
Enclosure:	Injection molded, ultra-high impact plastic offering high chemical resistance
Dosage Feed Rate:	Programmable to 3/4 gallons per cycle
Dispensing Cycle Time:	Programmable to 8 minutes per cycle
Pump Type:	Self priming with brush type motor 12v to 24V DC



PO Box 7444 · Warner Robins GA 31095
478.922.5340
Quality Assurance Hotline 800.841.3904
9:00am - 4:00pm Monday through Friday (EST)
EMERGENCY ASSISTANCE
800.424.9300
(After hours and weekends)
odobanprofessional.com